

**POINT ONE**  
TECHNOLOGY

LOW-PROFILE

**GUST**

VERSION/SPECIFICATION

**VSPEC-IV**

*PURE SPEED EDITION*



**Edition 4.1**

# GUST

POINT ONE  
TECHNOLOGY

VERSION/SPECIFICATION  
**VSPEC-IV**

1.

## SCREWLESS DESIGN

Patented design that hides exposed screws and body works

2.

## SILICONE BODYWORK

High tensile strength and sound dampening capability

3.

## OSRAM GmbH. LIGHT KIT

All-new heat dissipation mechanism with enlarged surface area for heightened longevity and brightness

4.

## A.B.S COMPOSITION

ABS plastic has outstanding impact resistance strength and good electrical insulating qualities. It can endure physical impacts and maintain durability under pressure due to combination of styrene and butadiene in it

5.

## AGGRESSIVE ANGLE

All-new CFD designed air foil mechanism brings the most aero-efficient and powerful air draft design to life


THE MOST EFFICIENT LOW PROFILE  
CEILING FAN EVER CREATED **YET.**

PURESPEED



CASING POLAR WHITE + CYLINDER POLAR WHITE + BLADE POLAR WHITE

PURESPEED

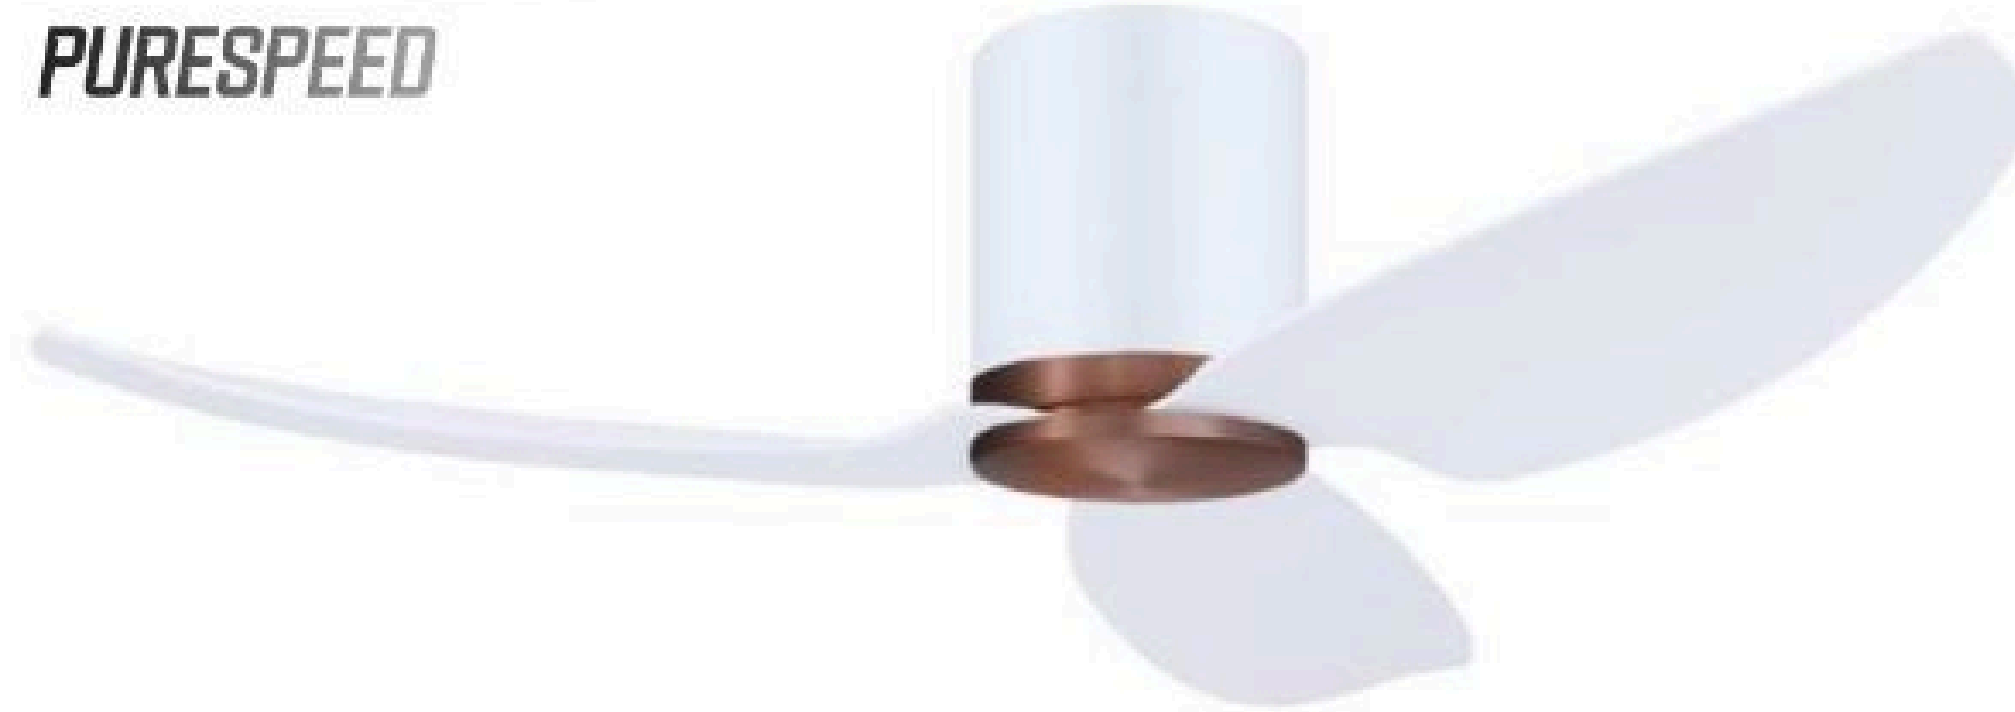

CASING COPPER BRONZE + CYLINDER POLAR WHITE + BLADE POLAR WHITE

PURESPEED



CASING ALUMINUM SILVER + CYLINDER POLAR WHITE + BLADE POLAR WHITE

PURESPEED



CASING POLAR WHITE + CYLINDER POLAR WHITE + BLADE CHERRYWOOD

PURESPEED



CASING COPPER BRONZE + CYLINDER POLAR WHITE + BLADE CHERRYWOOD

PURESPEED



CASING ALUMINUM SILVER + CYLINDER POLAR WHITE + BLADE CHERRYWOOD

PURESPEED



CASING CARBON BLACK + CYLINDER CARBON BLACK + BLADE CHERRYWOOD

PURESPEED



CASING COPPER BRONZE + CYLINDER CARBON BLACK + BLADE CHERRYWOOD

PURESPEED



CASING ALUMINUM SILVER + CYLINDER CARBON BLACK + BLADE CHERRYWOOD

PURESPEED



CASING CARBON BLACK + CYLINDER CARBON BLACK + BLADE CARBON BLACK

PURESPEED



CASING COPPER BRONZE + CYLINDER CARBON BLACK + BLADE CARBON BLACK

PURESPEED



CASING ALUMINUM SILVER + CYLINDER CARBON BLACK + BLADE CARBON BLACK



34"



44"

\$469.00

OSRAM GmbH. Light Kit + \$80.00

# WARRANTY



Incl. NSK Ceramic Ball Bearings  
& Additional Mechanical  
Component Wear & Tear



Including structural  
integrity of the  
external casing



Including but not  
limited to Remote  
Control & Driver



Including Labor  
& Transport  
(Appl. for Agent  
Installation only)

# DIMENSION



# INSTALLATION

## CONCRETE CEILING

< 3.0m	\$ 50.00
3.0m - 3.5m	\$ 80.00
> 3.5m	\$ P.O.A

## FALSE CEILING

< 3.0m	\$ 150.00
3.0m - 3.5m	\$ 180.00
> 3.5m	\$ P.O.A

# SPECIFICATIONS


## GUST VERSION/SPECIFICATION VSPEC-IV PURESPEED 34"

SPEED 1	220 RPM / 7.8 W
SPEED 2	241 RPM / 9.7 W
SPEED 3	253 RPM / 12.7 W
SPEED 4	283 RPM / 18.6 W
SPEED 5	314 RPM / 20.1 W
SPEED 6	331 RPM / 24.9 W
WEIGHT	5.2 kg

## GUST VERSION/SPECIFICATION VSPEC-IV PURESPEED 44"

SPEED 1	148 RPM / 8.3 W
SPEED 2	186 RPM / 11.8 W
SPEED 3	209 RPM / 15.2 W
SPEED 4	238 RPM / 22.2 W
SPEED 5	266 RPM / 30.2 W
SPEED 6	301 RPM / 37.9 W
WEIGHT	5.5 kg

# PERFORMANCE

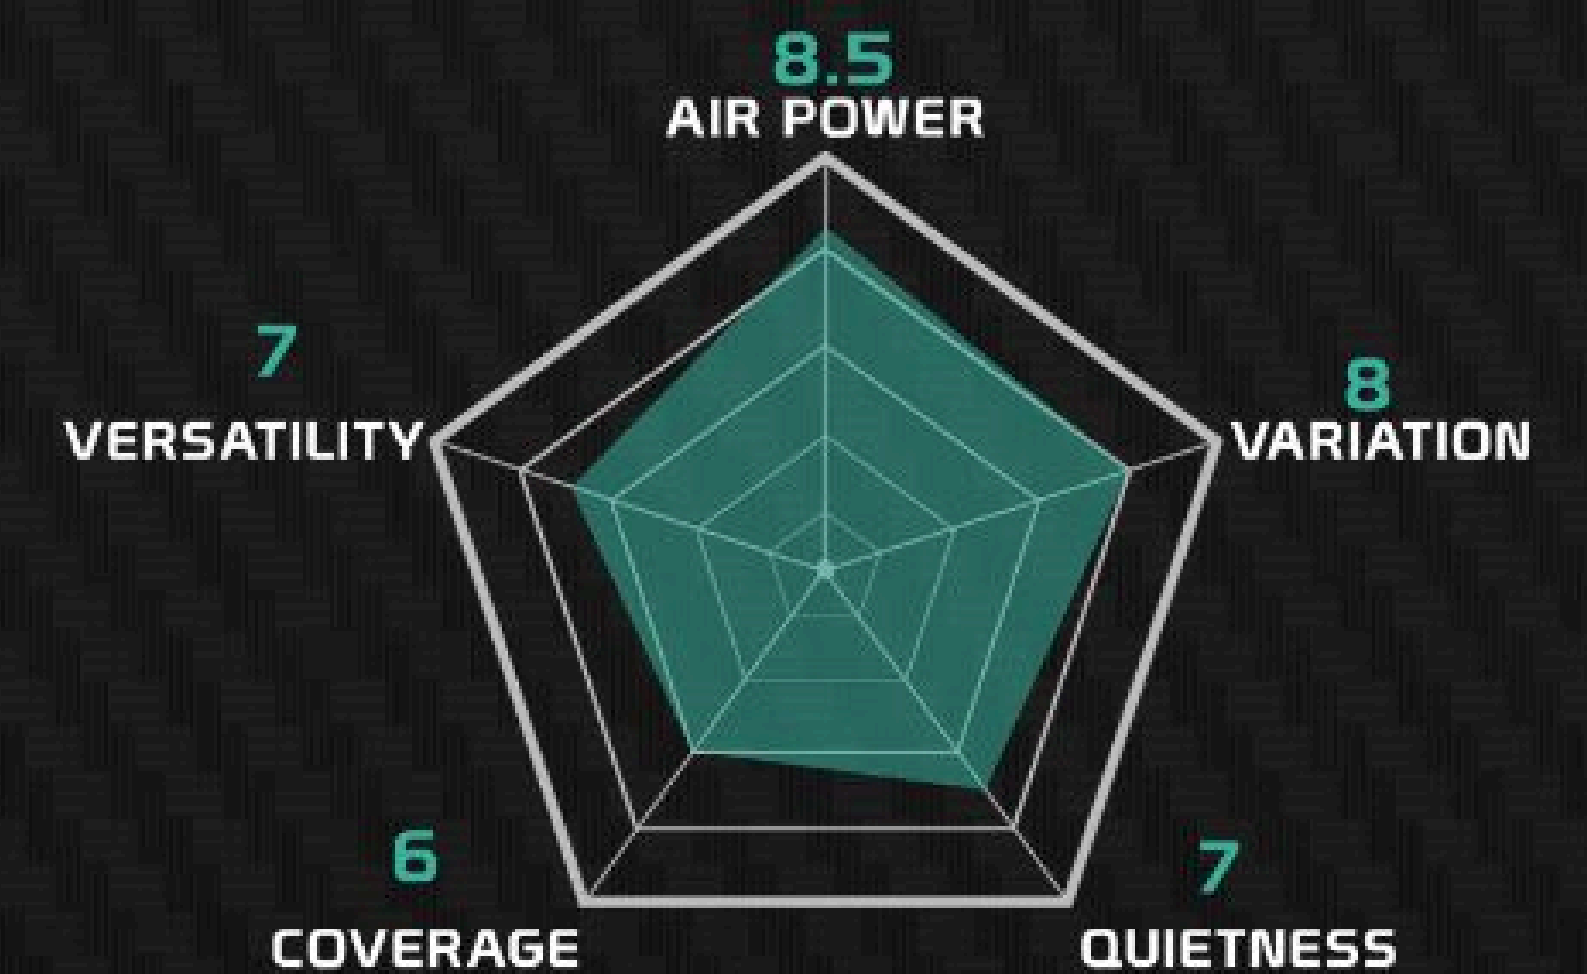

**POINT ONE**  
TECHNOLOGY